

SLING PROTECTION

Most synthetic sling accidents are caused by cutting. There are many kinds of protective sleeves and pads available, but only two synthetic protectors provide adequate cut protection: CornerMax® pads and CornerMax® sleeves. They have been engineered and tested to provide 25,000 lbs. of protection per inch of sling width (4464 kg per centimeter of sling width). CornerMax® pads are designed for 90° straight edges. CornerMax® sleeves are for other edges – curved, rough, or irregular – and are the protection of choice for I-beams. For synthetic slings, the most critical decision is whether cut protection is needed.

Cut Protection – Engineered Softeners

CornerMax® pads are shown in the right two photos. The pad creates a “tunnel” of cut protection – a no-touch zone. Therefore, the edge does not come in contact with the pad or sling. Note that the sides of the pads must be completely supported in order to create and maintain the “tunnel”.




CornerMax® sleeves may look like traditional protection sleeves, but ours are made of Dyneema® fiber that is specially woven to provide cut protection for a variety of edges and surfaces. Most commonly used sleeve material cannot stop an edge from cutting the sleeve and possibly the sling too. For test results, see the chart on the reverse side.



Call your Slingmax Rigging Solutions dealer for assistance in making the right choice for protecting your rigging.



This chart shows the results of testing slings protected by 12 different synthetic materials that are often used for sling protection. In our tests, ten of the most commonly used materials do not allow a sling to reach its working load before the sling is cut and fails. The CornerMax® pad and sleeve allow the synthetic sling to meet its working load with no damage to the sling or the protection.

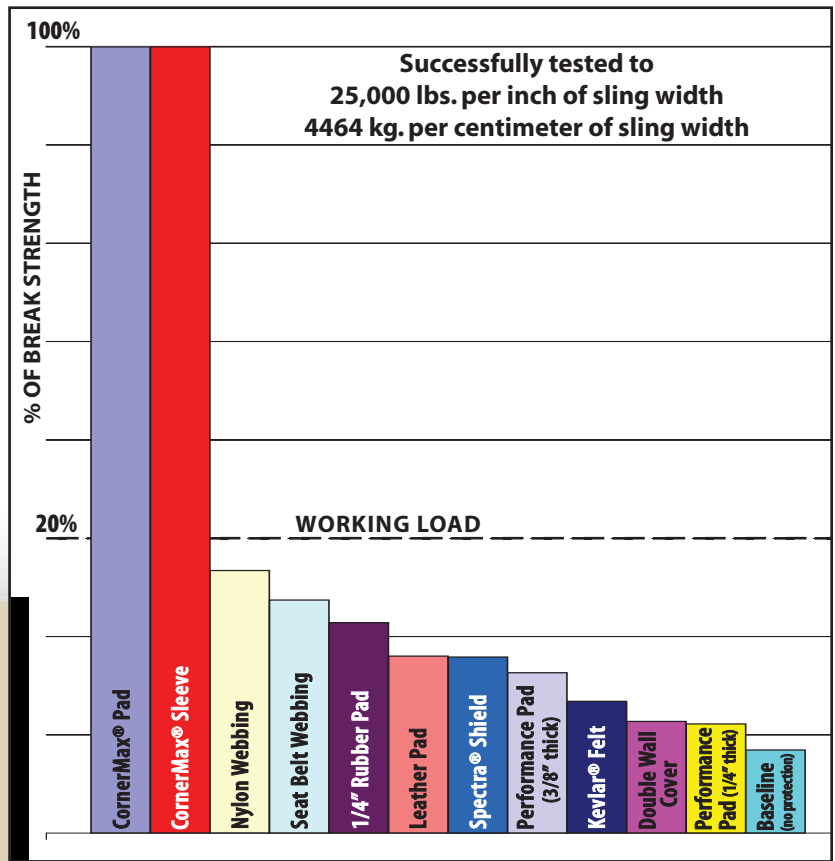

Other Sling Protection...



Sometimes cut protection is not needed. We have a full line of engineered softeners that are excellent for abrasion protection or for protecting a load surface. The Shackle Pin pad is designed to prevent a synthetic sling from damage when a sling is seated on the pin side of a shackle.



Your Slingmax Rigging Solutions dealer can help you make the right choice for protecting your rigging. Call today!



⚠️ WARNING

Damaged or misused protection can result in sling damage or failure. Inspect before each use for cuts, tears, or damage that may prevent protection of the sling. Ensure that protection is the correct size and type to protect the sling. Prevent the sling and its protection from sliding across the load edge. DEATH or INJURY can occur from improper use, maintenance, or inspection.
MAXIMUM LOADING: 25,000 lb. per inch of sling width (4464 kg/cm of sling width).



SLINGMAX® and CornerMax® trademarks are the property of Slingmax, Inc. Dyneema® trademark is the property of DSM N.V.

P.O. BOX 2423 • ASTON, PA 19014-2423 USA

TEL: 800-874-3539 • 610-485-8500 FAX: 610-494-5835

www.slingmax.com